




2011

TRIX

TRIXS

Miniaturisation was the name of the game when it came to designing the new TRIXS system luminaire. The starting point was the development of a particularly small parabolic specular louvre that achieves excellent photometric values despite its small size. This is due to the new type of geometry of louvre and the use of a highly reflective base material.

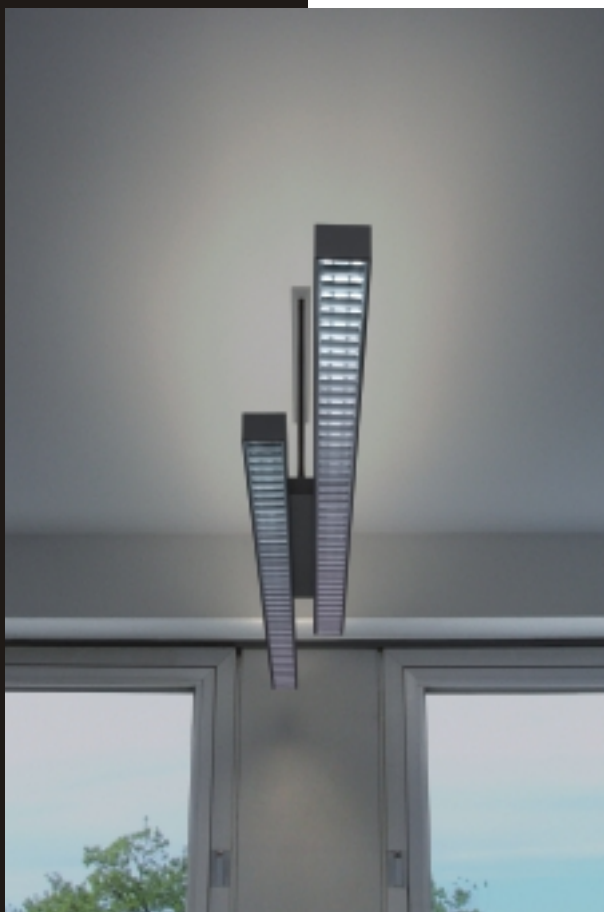




Parabolic Louvre

Parabolic louvre with highly reflective surfaces. Aluminium with reflection-intensifying coating to increase the light output ratio. Computer-workstation compatible CAT 2.



Diffuser


Cover designed as an acrylic diffuser. Satin-matt opal surface with high transmission factor for diffuse light distribution and glare-free light.

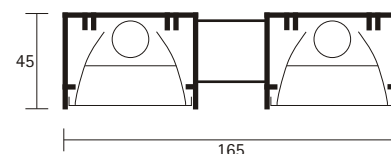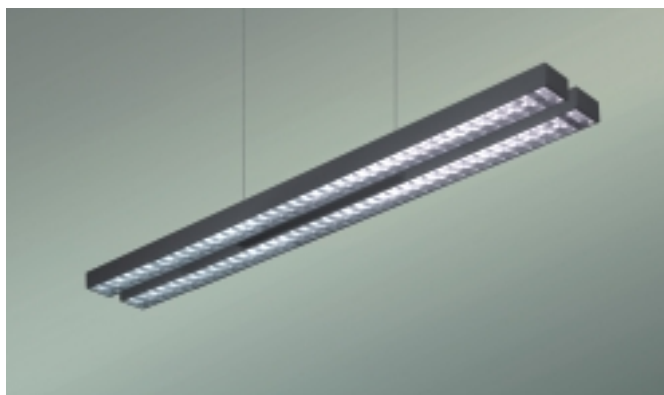

TRIXS

Pendant luminaire made of sharp-edged, drawn aluminium profile, direct/indirect, equipped for high output T5 fluorescent lamps with electronic control gear. The control gear is integrated in the blank section of the design. The control gear compartment is linearly coupled to the housing; on double units it is positioned between the profiles.

A direct/indirect parabolic louvre is used as the optical system. An opal acrylic diffuser is available as an alternative. Luminaire complete with flush fitting end plates. Wired ready-to-connect with heat resistant cable. Output line: transparent, 2m. Optionally available with pendant tube set or with wire-rope/rapid connector system.



					Version					
					Direct/indirect	Parabolic louvre	Acrylic diffuser	Silver C3	Made to RAL	Anodized aluminium
Article No. Lamp version										
	L = 1480mm	9540.249	2 x T16	35/49/80W	●	●		●	○	○
	L = 2360mm	9540.454	4 x T16	28/54W	●	●		●	○	○
	L = 1480mm	9541.249	2 x T16	35/49W	●		●	●	○	○
	L = 2260mm	9541.454	4 x T16	28/54W	●		●	●	○	○
	L = 1565mm	9544.254	2 x T16	28/54W	●	●		●	○	○
	L = 1965mm	9544.280	2 x T16	35/49/80W	●	●		●	○	○
	L = 1565mm	9545.254	2 x T16	28/54W	●		●	●	○	○
	L = 1965mm	9545.249	2 x T16	35/49W	●		●	●	○	○
	L = 1620mm	9542.154	1 x T16	28/54W	●	●		●	○	○
	L = 1920mm	9542.180	1 x T16	35/49/80W	●	●		●	○	○
	L = 1620mm	9543.154	1 x T16	28/54W	●		●	●	○	○
	L = 1920mm	9543.149	1 x T16	35/49W	●		●	●	○	○

Imprint

SEEGER

Technische Leuchten e. K.
Schwerter Str. 324
D-44287 Dortmund
Germany

Tel: +49 231- 44 10 92
Fax: +49 231- 44 10 76

info@seeger-licht.de
www.seeger-licht.de

VAT ID no.: DE 124779953
Tax no.: 315/5231/0060

Amtsgericht Dortmund
(Local first-instance court)
Commercial Register No.: HRA 16 133

General Information

All previous catalogues and the statements made therein are null and void with the publication of this issue. We reserve the right to make technical and formal changes to the listed products. The catalogue may contain errors. The lighting data, technical specifications and dimensions and the representational images and drawings shown in this catalogue are unbinding. All stated measurements are approximate and, unless otherwise stated, are given in millimetres. Unless otherwise stated, illuminants do not form part of the shipment. All brand names are the property of their rightful owners and serve only for descriptive purposes.